




WSD-1006  
2 2022

# 5-COLOR MATRIX MESSAGE SIGN

MODEL WVTM-5C  
PRODUCT SPECIFICATIONS | FEBRUARY 2022

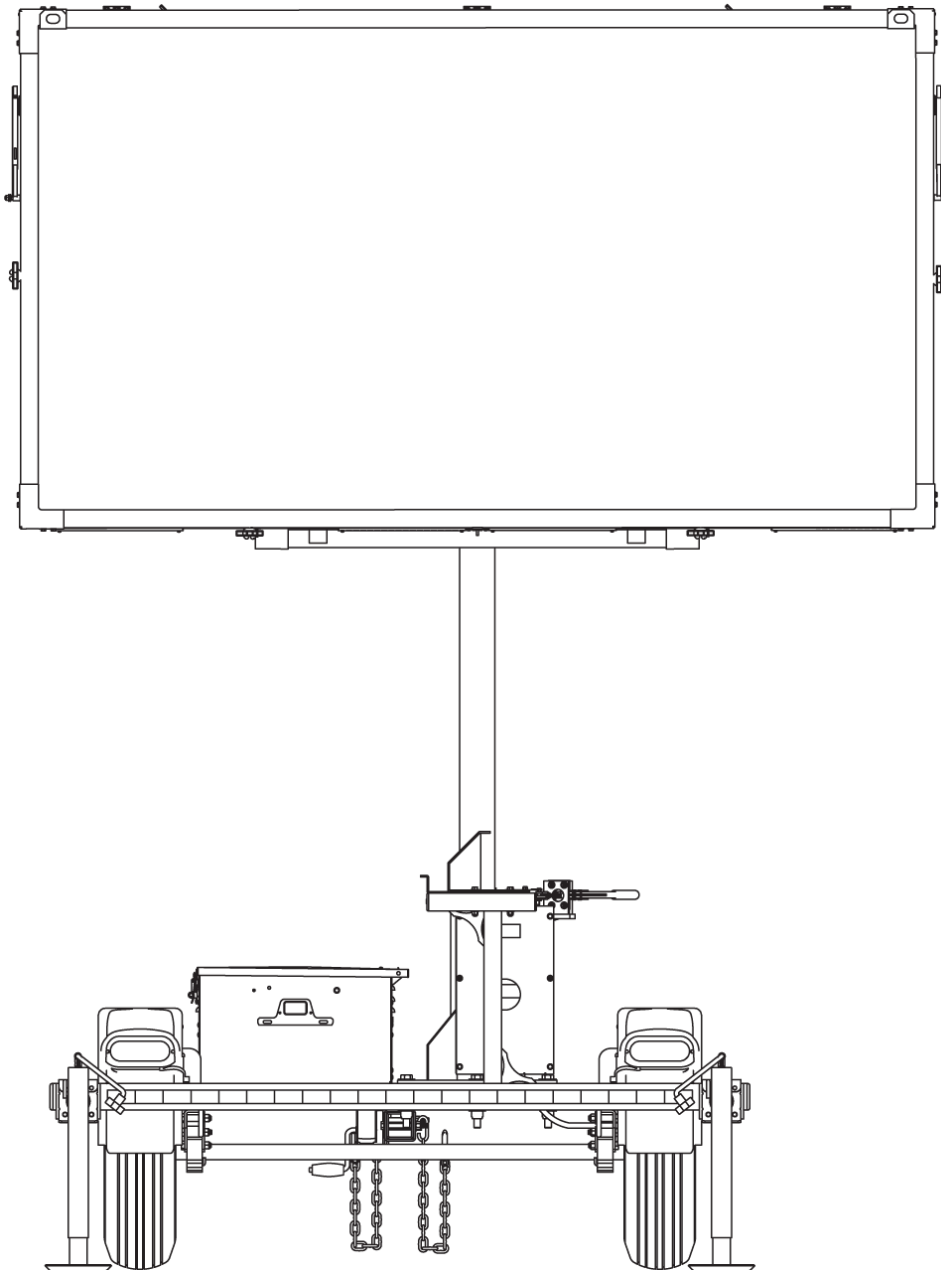

## 1. SYSTEM

- 1.1. Description      Wanco® Five-Color Message Signs provide information to the public on a color LED display that can present text, graphics, or a combination of both. The color display provides excellent visibility and low power consumption. The signs are portable and self-powered, requiring no permanent installation or wiring.
- The sign has a self-contained onboard computer and touchscreen controller, making a laptop or external controller unnecessary. The control system comes configured with preprogrammed messages, and users can create custom messages using computer software that is included with the sign.
- For optimal positioning, the sign rotates independent of the trailer and its height is fully adjustable. Jack-legs and optional outriggers provide adjustability and stability. The trailer is easy to maneuver and deploy, and can be towed by most vehicles.
- Power is provided by maintenance-free batteries, which are charged by an automated solar charging system.
- 1.2. Model      WVTM-5C five-color matrix message sign
- 1.3. Temperature limits      Operating      -29 to 165°F (-34 to 74°C)  
Storage      -40 to 185°F (-40°C to 85°C)
- 1.4. Standards      Compliant in accordance with NTCIP Version 2

## 2. FEATURES

- 2.1. Message design
  - Message Graphics computer software included for creating custom messages
  - Create, import and edit graphics
  - Add and format text
  - Export messages to sign and save files for copying and editing
- 2.2. Setup
  - Hydraulic lift raises sign display on tower
  - Tower rotates 360 degrees for optimal positioning
  - Single disk brake holds tower in place during operation, while a cradle supports and holds board in travel position
- 2.3. Operation
  - Large, five-color, full-matrix display for text and graphics
  - Self-contained onboard computer
  - Full-color touchscreen controller with high-resolution display
  - Multi-level password protection restricts access to control software
  - Preprogrammed text messages, symbols and graphics
  - Internal clock facilitates built-in schedule programming
  - Optional outriggers widen footprint for added stability
  - Cooling fans protect sign cabinet from overheating
  - NTCIP compliant

- 2.4. Power system
- Battery powered and solar charging
  - Energy-efficient operation results in long run times
  - Solar panels charge batteries automatically without intervention
  - Charging system shuts down when batteries are fully charged, preventing damage
  - Power system allows battery charging with solar panels or commercial power
  - Cooling fan protects battery charger from overheating
  - Battery box can be locked to prevent unauthorized access
- 2.5. Maintenance
- Maintenance-free batteries
  - Individual display modules can be replaced easily
  - Standard trailer tires
  - Heavy-duty bolt-on fenders can be replaced if damaged
  - Durable powder-coat finish resists the elements
- 2.6. Application
- Common applications include:
- Special events
  - Traffic calming
  - Emergency response
  - Public notices
  - Corporate functions

### 3. DISPLAY

#### 3.1. Cabinet

- 3.1.1. Description
- Weather-resistant cabinet contains display modules and related electronics. Hinged door with full-size display window protects electronics and provides access for maintenance. Clasps hold door closed during operation and the door can be locked with user-supplied padlock.
- 3.1.2. Size
- 104" x 59" x 6" (264 x 150 x 15cm) W x H x D
- 3.1.3. Material
- Aluminum sheet, 5052-H32, 0.062" (1.575mm) thick
- 3.1.4. Construction
- Panels are riveted together, with internal ribs to add lateral strength
- 3.1.5. Door
- Cabinet door is aluminum extruded frame with sheet metal corner brackets. Stainless steel butt hinges are bolted to top of cabinet and door.
- Window is anti-glare Lexan® solar-grade polycarbonate, 0.150" (3.81mm) thick. Bulb-type weather seal ensures tight fit and seal between window and door frame.
- When sign is in stored position, door fully opens to service the sign cabinet interior. Telescoping prop-slides, one on each side of the cabinet, hold door open.
- 3.1.6. Finish
- Cabinet and door are coated with oven-baked, flat-black, powder-coat finish to ensure durability and corrosion protection. Assemblies are high-pressure phosphate-washed prior to finish coat.

- 3.1.7. Wiring
 

Wiring service loop from computer box to display cabinet is routed inside liquid-tight loom and P-clamped to trailer frame. Service loop length is designed to allow sign rotation. All wiring connectors and procedures are per CSA standards.
- 3.1.8. Ventilation
 

Two cooling fans located at the top of the display cabinet circulate air into, through, and out of the cabinet to cool electrical components. A duct is located at the top of the cabinet to ensure even airflow.

It is proven that electronic components, including LEDs, degrade in conditions of extreme heat. Without the cooling fans the display cabinet can reach over 200 degrees Fahrenheit.

A temperature sensor is mounted on the photocell PC board inside the cabinet to control fan operation. Each fan has its own thermal settings, adjustable with the onboard computer, to optimize battery power usage.
- 3.1.9. Storage
 

When lowered for storage and transport, the display cabinet rests in two support cradles, parallel to the trailer length, no locking pins required
- 3.2. Display matrix
  - 3.2.1. Description
 

The display matrix is comprised of a series of display modules laid out in a grid across the inside of the display cabinet. Each module has a matrix of LEDs installed on its face, which light up to show a portion of the configured message. Each module features the necessary electronics and coatings to ensure outstanding performance and durability.
  - 3.2.2. Display modules
    - Modular design
 

Allows any display module to be installed in any position in the matrix without repositioning DIP switches
    - Wiring
 

Modules have quick-connect electrical connectors for easy servicing. All wiring terminates at a single terminal strip inside the display cabinet.
    - Replacement
 

Each module can be exchanged in less than two minutes. The only tool needed is a 5/16-inch nut driver socket or slotted screwdriver

After a new module is installed, a one-step initialization process causes each module to sense its position in the full-matrix display. Initialization is accomplished using the sign’s controller.
    - Size
 

16.0" (40.6cm) wide by 13.15" (33.4cm) high, nominal
    - Material
 

FR4 glass-reinforced epoxy laminate, double-sided, black solder mask with white silkscreen


Board thickness, 0.094" (2.388mm)

Copper size, 1 oz (28.4g)

Coating	5-mil, military-spec, low-VOC, silicone conformal coating (Dow Corning 1-2577) provides long-term protection against moisture and other atmospheric contaminants, resists corrosion and shorts due to high humidity
Vibration mounts	All display modules are mounted on rubber vibration-isolation mounts, decreasing risk of physical shock during transport and isolating characters from chassis ground
Temperature limits	-40 to 176°F (-40 to 80°C)
Humidity limits	Conformal coating rated to 95% relative humidity

3.2.3. Pixels

A cluster of 15 LEDs form a “pixel”  
 Each pixel has 3 LEDs of each color (amber, blue, green, red, white):



Pixel size	1.0625" (27mm) diameter
Full matrix	60 pixels wide, 32 pixels high, 1920 pixels total
Display module	10 pixels wide by 8 high, 80 pixels total
Pixel pitch	42mm, horizontal and vertical

3.2.4. LEDs

Technology	AlInGaP II (aluminum indium gallium phosphide) technology, T-1¾ size, through-hole auto-insertion	
Color range	Amber	589.5 to 592.0 nm
	Blue	470 to 475 nm
	Green	525 to 530 nm
	Red	620 to 625 nm
	White	Not applicable

3.2.5. LED shields

Each individual LED is shielded from the other LEDs in each pixel, preventing “phantom” lighting of unlit LEDs by lit LEDs, reducing reflected light, improving angularity, and enhancing the clarity of the display

3.2.6. Viewing angle

Total viewing area, 25 degrees nominal

3.2.7. Brightness

Factory preset for optimal viewing and power consumption

- 3.2.8. Auto dimming Two photocells detect ambient light on the message sign; the message sign computer adjusts the brightness of the LEDs accordingly, dimming display brightness in darkness, increasing to full brightness in daylight  
Photocells are mounted inside the sign cabinet, one facing rear and one facing front
- 3.2.9. Software design
- |            |   |
|------------|---|
| Driver     | LEDs controlled through 10mA pulse-width modulation design  |
| Addressing | Each display module address is selected through a software command; no DIP switches are used. The address does not change until reprogrammed, preventing the message from shifting due to an individual module failure. |
| Pixel test | Each module is equipped with individual pixel failure notification  |
- 3.2.10. Fonts
- 12 fonts  
See Exhibit A for font samples and additional font information
- |               |  |
|---------------|--|
| Default size  | 5 x 7 pixels (W x H), 8.66" x 11.97" (220 x 304mm)<br>4 lines of 10 characters per line, maximum |
| Smallest size | 4 x 5 pixels (W x H)   |
| Largest size  | 11 x 23 pixels (W x H)   |
| Other sizes   | See Exhibit A  |

#### 4. CONTROL SYSTEM

- 4.1. Description Self-contained onboard computer, comprised of a power control unit (PCU), located behind display modules inside the message sign display cabinet; and a display control unit (DCU), located inside control box on the back of the message sign display cabinet.
- 4.2. Control box
- 4.2.1. Size 12.3" x 11.7" x 5.3" (31.2 x 29.7 x 14.4cm) W x H x D
- 4.2.2. Material 0.08" aluminum
- 4.2.3. Mounting Securely fastened to the sign cabinet with six mounting screws
- 4.2.4. Door Front-panel is a door, hinged on the left, which opens fully
- 4.2.5. Latch Two quarter-turn latches on front of control box door keep hinged door closed. Both latches are keyed and can be locked.
- 4.2.6. Finish Cabinet and door are coated with oven-baked, equipment-white, powder-coat finish to ensure durability and corrosion protection. Assemblies are high-pressure phosphate-washed prior to finish coat.

- 4.3. Control panel
  - 4.3.1. Touchscreen
    - Display
      - Full color, backlit, 7-inch display
      - Capacitive touch panel
      - 800 x 480 pixels
      - Display automatically shuts off after 10 minutes of inactivity
    - Interface
      - Menu-based structure, accessed with virtual buttons on the touchscreen display, provides access to all sign functions including programming messages
      - Virtual keyboard appears when required for text entry
      - Multi-level password protection restricts access
  - 4.3.2. LED indicators
    - Indicates the following status conditions:
      - Solar charging system is charging batteries
      - System power shutdown occurred
      - Programmed schedule is active
      - Power to optional radar device is on
  - 4.3.3. Data port
    - One USB port for uploading custom messages, updating message sign software, and downloading data from the optional traffic data collector (if installed; see “Options and Optional Equipment”)
- 4.4. PC boards
  - 4.4.1. Coating
    - 100% coated with military-spec, low-VOC, silicone conformal coating to provide long-term protection against moisture and other atmospheric contaminants. Resists corrosion and shorts due to high humidity.
  - 4.4.2. Humidity limits
    - Conformal coating rated to 95% relative humidity
- 4.5. Serviceability
  - Four plunger panel latches allow the control panel to be removed, providing access to internal components inside control box; PCU is accessible by removing display modules inside message sign display cabinet
  - All wiring connections have quick-connect plugs
- 4.6. Controller software
  - 4.6.1. Standards
    - Fully NTCIP-compliant
  - 4.6.2. Security
    - Three levels of password protection
  - 4.6.3. Message programming
    - Instant access to program new messages
    - Extremely easy to program
    - WYSIWYG (What You See Is What You Get) while programming

4.6.4. Message types	Quick-message	Easy quick-message activation
	Permanent	Over 90 preprogrammed permanent messages, including arrows and FHWA standards
	Changeable	250 changeable messages stored in NV flash
	Blank	Easy sign blanking/power off
4.6.5. Text alignment	Selectable: left, center, or right; and top, middle, or bottom	
4.6.6. Fonts	Selectable: see Exhibit A	
4.6.7. Blinking	Each character can individually blink	
	Individual lines of a multi-line message can blink	
	The entire message can blink	
	Adjustable timing and duty cycle	
4.6.8. Message pages	Maximum 12 sequential “pages” per message, sequencing speed from 0.1 to 25.5 sec.	
4.6.9. Scheduling	Real-time clock and calendar with DST control	
4.6.10. Arrow board functions	Sign can display any of the following 12 full-size arrow functions	
	Modes	Flashing left or right arrow Flashing double arrow Flashing four-corner warning Flashing caution-bar warning Sequencing left or right stem arrow Sequencing left or right walking arrow Sequencing left or right chevron arrows Alternating diamonds (for samples, see Exhibit B)
	Bold graphics	Each arrow and bar is 5 pixels wide
4.6.11. Configuration	Menus provide access to all message sign configuration settings	
4.6.12. Troubleshooting	System status on main screen, detailed status and diagnostic menus provide additional message sign information to assist in troubleshooting	



## 5. GRAPHICS SOFTWARE

- 5.1. Description Computer software provides the tools necessary for creating custom messages. Create new messages in five colors. Create messages from scratch using text, graphics or a combination of both; or edit previously created messages. Import graphic images, such as logos and digital photos.
- 5.2. System requirements Any computer running Microsoft® Windows® XP or later
- 5.3. File formats Save files in proprietary format that the program can open for editing  
Save objects created in a message for re-use when creating new messages  
Export files in the NTCIP MULTI format for uploading to a message sign  
Import MULTI files for bitmap editing
- 5.4. Message transfer Transfer messages to sign directly from the graphics program when the computer is connected to the sign via a wireless modem  
Transfer messages to the sign using the Wanco NTCIP Central software after export in the MULTI file format  
Transfer messages to the sign using a USB flash drive after export in the MULTI file format

## 6. TRAILER

- 6.1. Frame All welded structural steel
- 6.2. Tie-downs One on each corner of frame
- 6.3. Finish Oven-baked, safety-orange powder-coat finish to ensure durability and corrosion protection. Assemblies are bead-blasted and then run through a five-stage, high-pressure phosphate-wash prior to application of the finish coat.  
See "Options and Optional Equipment" for color options.
- 6.4. Fenders Round, full wheel coverage, bolted to trailer frame, removable and replaceable
- 6.5. Axle assembly 2000 lb (907kg) capacity, 5 on 4.5" B.C. idler hub
- 6.6. Springs Double-eye leaf springs
- 6.7. Tires ST205/75D15 steel-belted trailer tires, load rating B
- 6.8. Drawbar
- 6.8.1. Construction Telescopes inside receiver sleeve welded under trailer frame. Removable for shipping and for added theft protection if needed. Secures with two 1/2-inch (12mm) diameter bolts.
- 6.8.2. Material Square tubing, 3" x 3/16" wall (7.62cm x 0.476cm wall)
- 6.8.3. Jack Top-wind swivel, 800 lb (363kg) capacity with caster wheel to make moving trailer easier

- 6.8.4. Tow hitch Standard 2-inch ball coupler tow-hitch, SAE Class 2, 3500 lb (1588kg) capacity. Bolts to drawbar, removable and replaceable.  
See “Options and Optional Equipment” for tow-hitch options.
- 6.8.5. Tow chains Two high-test proof coil chain assemblies, with “latching” S-hooks for towing. Chains attached to drawbar with quick connectors.
- |                    |                  |
|--------------------|------------------|
| Material diameter  | 0.406" (10.3mm)  |
| Working load limit | 5400 lb (2450kg) |
| Breaking force     | 16,200 lb (72kN) |
- 6.9. Stabilizer jacks Four swivel jacks, each with 2000 lb (907kg) capacity, mounted on corners of trailer frame  
See “Options and Optional Equipment” for outriggers
- 6.10. Wind resistance In the deployed position, the maximum sustainable wind speed before overturning, when supported by the standard jack stands with tires off the ground, is 72 mph (115km/h)
- 6.11. Wiring
- 6.11.1. Description Wiring to connect tow vehicle and trailer for trailer taillights is installed inside drawbar, with pigtails and connectors at both ends; no crimping required
- 6.11.2. Trailer plug A sealed, molded, 4-square connector plugs into harness under trailer
- 6.11.3. Tow-vehicle plug Two-piece assembly with 4-flat molded connector on harness plugs into tow vehicle  
Meets SAE J1239  
See “Options and Optional Equipment” for tow-vehicle plug options
- 6.11.4. Protection All trailer wiring encased in UV protective loom, and attached with P-clamp riveted to trailer frame; no exposed wires
- 6.12. Taillights Two oval-shaped, sealed, LED, combination stop, turn and taillights integrated with fenders
- 6.13. License plate Lighted license plate light holder
- 6.14. Reflectors Sides of trailer have amber reflectors near front and red reflectors near rear  
See “Options and Optional Equipment” for reflective tape
- 6.15. Tower assembly
- 6.15.1. Function Sign cabinet is raised and lowered on a telescoping tower
- 6.15.2. Tower construction Two sections of square steel tubing with the inner section telescoping inside the outer section.  
Nylon guide blocks keep the sections tight, eliminating the need for greasing the tower and preventing dirt from building up on the inner tower section. Dirt would cause performance problems and maintenance issues.

- 6.15.3. Swivel base                      A steel tubular weldment is bolted to the trailer frame. The outer tower section rotates on a thrust bearing and washers inside the swivel base, reducing rotating friction.
- 6.15.4. Finish                              Tower sections and swivel base are fully galvanized
- 6.15.5. Height                              At fully deployed height, 84" (213cm) from ground to bottom of display cabinet
- 6.15.6. Height lock                      Locking pin inserted through the tower in the up position prevents the tower from falling if the hydraulics were to fail
- 6.15.7. Hydraulic lift
- |                      |   |  |
|----------------------|---|--|
| Function             | Raises display cabinet with a hydraulic power unit that pressurizes a cylinder; lowered by controlled gravity return. |  |
|                      | Control switch for hydraulic lift is located on battery box. Switch cover accepts small padlock.                      |  |
| Hydraulic cylinder   | Single stage hydraulic, rated to 1500 psi, bottom end cap is keyed to prevent cylinder from rotating                  |  |
| Hydraulic power unit | Type  | Electric motor driven<br>See "Options and Optional Equipment" for hand pump  |
|                      | Voltage   | 12Vdc  |
|                      | Flow rate   | 1.5 gpm  |
|                      | Pressure rating   | Factory set to 950 psi   |
|                      | Mounting  | Installed vertically on bracket attached to swivel base  |
|                      | Fluid   | AW-32 hydraulic oil  |
|                      | Tank capacity   | 1.2 gal. total, 0.766 gal. usable capacity   |
|                      | Cover   | Sheet metal cover protects power unit from vandalism and environmental contaminants. Security screws fasten cover to power unit. |
- 6.15.8. Rotation                              Sign rotates by hand, pivoting 360 degrees on tower
- 6.15.9. Rotation lock                      Sign rotation is locked with an adjustable lever that operates a mechanical friction caliper and disk brake. The ½-inch thick, round, zinc-plated brake disk is bolted to the outer tower section.
- 6.15.10. Sight tube                              A sight tube for aiming the message sign is mounted under display cabinet

## 7. POWER SYSTEM


- 7.1. Description Electronics powered by batteries, which are charged automatically with integrated solar charging system
- 7.2. Battery box
  - 7.2.1. Function Holds batteries and remote charger  
See “Options and Optional Equipment” for heavy-duty secure battery box
  - 7.2.2. Security High-security battery box with tamper-resistant features:  
Heavy-gauge steel lid  
Hidden hinges  
Heavy-duty hidden-shackle padlocks
  - 7.2.3. Construction Riveted all-steel construction  
All parts powder-coated before assembly  
Divider panel inside box separates batteries from electronics  
Louvers provide ventilation  
Latches keep cover closed and can accept user-supplied padlocks
  - 7.2.4. Location Centered over axle on left side of trailer, bolted to trailer frame
- 7.3. Batteries
  - 7.3.1. Description Three 4D AGM 12Vdc batteries  
See “Options and Optional Equipment” for battery options
  - 7.3.2. Features 100% maintenance-free  
Sealed and spill-proof  
Faster recharge and greater freeze resistance than conventional batteries  
Contains less lead than conventional batteries
  - 7.3.3. Voltage 12Vdc each
  - 7.3.4. Weight Approx. 160 lb (72kg) each
  - 7.3.5. Capacity 600 Ah total
  - 7.3.6. Low-voltage disconnect (LVD) To protect batteries from full discharge, the LVD system automatically shuts down power when battery voltage drops to preset level, and re-engages power when battery charge returns to optimum

- 7.4. Remote charger
- 7.5. Function Plugs into a standard commercial power source to recharge batteries if battery voltage drops due to lack of sun for automated solar charging system
  - 7.5.1. Type 12-volt battery charger
  - 7.5.2. Location Inside battery box, mounted to divider panel on opposite side from batteries
  - 7.5.3. Output capacity 45A
  - 7.5.4. Output voltage 13.4Vdc @ full load  
13.6Vdc standard float voltage  
14.2Vdc with dual-voltage jack installed
  - 7.5.5. Input voltage 108 to 132Vac, standard three-prong plug
  - 7.5.6. Input frequency 50 to 60 Hz
  - 7.5.7. Cooling Automatic fan cooling
- 7.6. Solar
  - 7.6.1. Panels Two high-efficiency multi-crystal photovoltaic solar modules
  - 7.6.2. Location Behind message sign, over tower. Solar panel array lies flat; rises and rotates with message sign. No shadowing effect on any trailer component.
  - 7.6.3. Power output 130W each  
260W total  
See “Options and Optional Equipment” for solar power options
  - 7.6.4. Current 9.5A max. system current  
10.3A open short-circuit current
  - 7.6.5. Voltage 17.9Vdc max.  
21.8Vdc open short-circuit voltage
  - 7.6.6. Regulation Solar panels regulated by message sign control system
  - 7.6.7. Security Solar panel array bolted to message sign frame with security screws and special security nut. Tool for security screws mounted inside battery box.


**8. DIMENSIONS & WEIGHT**

8.1. Dimensions *inches*  
*(cm)*

**Travel position**

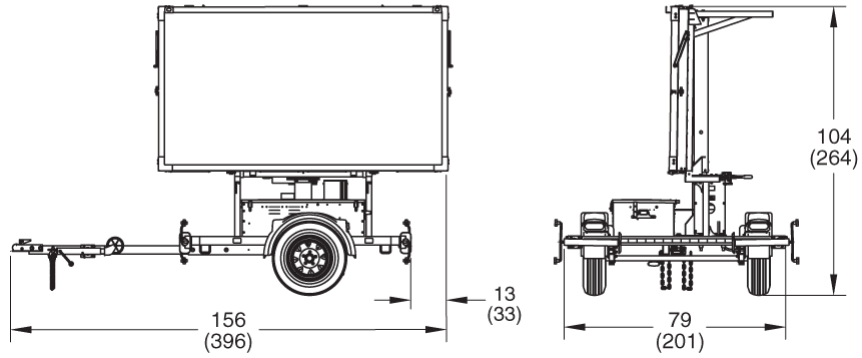

**Deployed position**

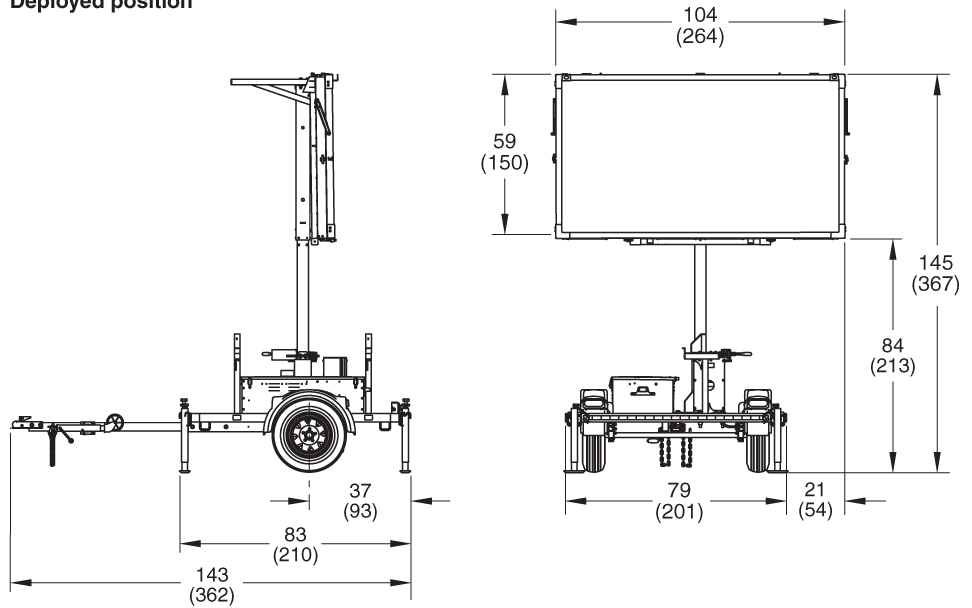

8.2. Weight **Approx. 1763 lb (800kg)**

## 9. OPTIONS AND OPTIONAL EQUIPMENT

- 9.1. Tow hitch** Combo-hitch for pintle hook and 2-inch ball hitch  
Heavy-duty lunette ring, 2½" ID x 1½" cross-section
- 9.2. Tow-vehicle plug** Many types of plugs available, prewired at the factory; contact factory for details
- 9.3. Outriggers** Telescoping outriggers (jack extensions), one at each corner of the trailer, expand trailer width when deployed, for extra wind-load resistance  
Width of trailer with outriggers extended: 131" (333cm)
- 9.4. Hand pump** A mechanical hand pump can raise and lower the sign if batteries go dead and hydraulic lift fails to operate. Pump handle is stored inside battery box.
- 9.5. Power**
- 9.5.1. Additional batteries For geographic locations with less solar charging potential or colder weather, and for applications that require year-round charging, add batteries for greater capacity  
Option One additional 4D AGM 12Vdc battery, 200Ah additional capacity
- 9.5.2. 6-volt batteries Replace standard batteries with lighter-weight 6Vdc batteries, wired in parallel and series for a 12-volt system  
Options Six Group 24 AGM 6Vdc batteries, 645Ah total capacity  
Eight Group 24 AGM 6Vdc batteries, 860Ah total capacity  
Weight Approx. 60 lb (26kg) each
- 9.5.3. Remote charger When required for added battery charging capacity, replace standard remote charger with 75-amp charger
- 9.5.4. Solar For geographic locations with less solar charging potential or colder weather, and for applications that require year-round charging, additional solar power is available  
Option 390W solar array; contact factory for details
- 9.6. Reflective tape** Reflective red-and-white conspicuity tape across rear trailer frame for increased visibility
- 9.7. Finish color** Specify power-coat color and, if applicable, color scheme
- 9.8. Radar-based speed monitoring system**
- 9.8.1. Description Radar senses the largest, nearest mass moving toward it. The message sign conveys a user-selected message to the motorist.
- 9.8.2. Sensor Microwave K-band, approach-only
- 9.8.3. Location Radar head located on the bottom of the message sign display cabinet, just off-center, for maximum effectiveness regardless of which side of the road the trailer is being used

- 9.8.4. Enclosure Radar head is sealed to withstand the elements
- 9.8.5. Standards compliance FCC approved  
CE compliant
- 9.8.6. Distance range 1000 ft (305 m)
- 9.8.7. Speed range 5 to 138 mph (8 to 222 km/h)
- 9.8.8. Accuracy ±1 mph from 5 to 100 mph (±1.6 km/h from 8 to 161 km/h)
- 9.8.9. Temperature limits -40 to 185 °F (-40 to 85 °C)
- 9.8.10. Electrical protection Fused and reverse-polarity protected
- 9.8.11. Calibration Calibration not required

**9.9. Cellular modem package**

- 9.9.1. Purpose The remote communications package enables the message sign to be controlled from remote locations away from the message sign, using an Internet-connected computer, tablet, or smartphone. Includes all of the items described below.
- 9.9.2. Remote NTCIP central control software
 

Description	Easy-to-use program connects a computer to an individual message sign via an Internet connection. Used for changing messages, checking on trailer health status (such as battery voltages), viewing GPS locations, and setting message schedules.
System requirements	Microsoft® Windows® (most versions) .NET framework Internet connection
- 9.9.3. Web-based remote control
 

Description	Using a standard Web browser, allows connection to an individual message sign without software. Ideal for smartphone users.
System requirements	Modern standards-compliant Web browser (such as Mozilla® Firefox®, Microsoft Internet Explorer® 10, Chrome™, or Safari®) with JavaScript enabled  A platform that supports one of these browsers (smartphone, laptop computer, or desktop computer)  Internet connection



9.9.4.	Wanco Fleet Manager	Description	Web-based application for managing even the most diverse message sign fleets
		Features	Add or remove equipment to groups for quick access, ideal for managing contractor rentals or entire projects all at once  Map GPS locations of entire message sign fleet simultaneously  Record vital information from signs, such as message changed by user and date, battery and solar voltages, and equipment alarms  Mass broadcast capability, perfect for Amber Alerts and emergencies
		System requirements	Modern standards-compliant Web browser (such as Mozilla Firefox, Microsoft Internet Explorer 10, Chrome, or Safari)  A platform that supports one of these browsers (laptop or desktop computer)  Internet connection
9.9.5.	Cellular plans	User provided	User obtains cellular data plan from, and makes monthly payments to, service provider. Wanco programs modem according to user-provided specifications at time of modem purchase. Wanco tests modem setup.
		Wanco cellular service	Wanco provides Verizon® cellular service without activation charges, monthly payments, or overage charges. User makes a single payment annually to Wanco. For increased security, Wanco hosts the service on a virtual private network (VPN).
9.9.6.	Modem	Compact industrial 4G LTE cellular gateway with GPS  Variety of models; contact factory for details	

**9.10. Traffic Data Classifier System**

9.10.1.	Design	Radar-based, nonintrusive, does not require loops or hoses, no disturbance of traffic flow during installation or use
9.10.2.	Direction	Registers both approaching and departing vehicles
9.10.3.	Traffic lanes	Most effective for 2-lane roads
9.10.4.	Traffic count	Can record data for more than 5 million vehicles in internal memory
9.10.5.	Data format	Speed, date, time, direction, length for each vehicle
9.10.6.	Units	English or metric
9.10.7.	Time stamp	Yr,Mo,Dy,Hr,Min,Sec.
9.10.8.	Speed range	5 to 138 mph (8 to 222 km/h)
9.10.9.	Sensor	Microwave K-band 24.125 GHz

9.10.10. Power	Message sign batteries
9.10.11. Power output	20 dbm (EIRP)
9.10.12. Current	110 mA
9.10.13. Internal memory	16GB
9.10.14. Baud rate	9600, 8 bit, no parity
9.10.15. Calibration	Calibration not required
9.10.16. Installation	Automatically positioned horizontally when trailer is level; adjustable bracket allows user to point toward traffic at a 45-degree angle
9.10.17. Analytic software	Wanco Traffic Analyzer

## EXHIBIT A: MESSAGE FONTS



### Font 1

5 x 7 pixels

Equivalent size: 8.66" x 11.97" (220 x 304mm)

Physical size: 7.68" x 10.98" (195 x 279mm)

Standard fixed-width font with lower-case letters

4 lines of 10 characters, maximum



### Font 2

5 x 8 pixels

Equivalent size: 8.66" x 13.62" (220 x 346mm)

Physical size: 7.68" x 12.64" (195 x 321mm)

Tall fixed-width font with lower-case letters

3 lines of 10 characters, maximum



### Font 3

6 x 9 pixels

Equivalent size: 10.32" x 15.28" (262 x 388mm)

Physical size: 9.33" x 14.29" (237 x 363mm)

Bold proportional font with 4x9-pixel capitals for lower-case letters

3 lines of 8 characters, typical



### Font 4

6 x 11 pixels

Equivalent size: 10.32" x 18.58" (262 x 472mm)

Physical size: 9.33" x 17.60" (237 x 447mm)

Bold proportional font with lower-case letters and accented characters

2 lines of 8 characters, typical



### Font 5

6 x 11 pixels

Equivalent size: 10.32" x 18.58" (262 x 472mm)

Physical size: 9.33" x 17.60" (237 x 447mm)

Bold proportional font with lower-case letters, accented characters, and increased spacing

2 lines of 7 characters, typical



### Font 6

5 x 12 pixels

Equivalent size: 8.66" x 20.24" (220 x 514mm)

Physical size: 7.68" x 19.25" (195 x 489mm)

Tall fixed-width font with 5x8-pixel capitals for lower-case letters

2 lines of 10 characters, maximum



**Font 7**

7 x 12 pixels

Equivalent size: 11.97" x 20.24" (304 x 514mm)

Physical size: 10.98" x 19.25" (279 x 489mm)

Bold fixed-width font with 6x8-pixel capitals for lower-case letters

2 lines of 7 characters, maximum



**Font 8**

7 x 23 pixels

Equivalent size: 11.97" x 38.43" (304 x 976mm)

Physical size: 10.98" x 37.44" (279 x 951mm)

Large fixed-width font with 6x14-pixel capitals for lower-case letters

1 line of 7 characters, maximum



**Font 9**


11 x 23 pixels

Equivalent size: 18.58" x 38.43" (472 x 976mm)

Physical size: 17.60" x 37.44" (447 x 951mm)

Large bold fixed-width font, capitals only (no lower-case letters)

1 line of 5 characters, maximum



**Font 10**

4 x 5 pixels

Equivalent size: 7.01" x 8.66" (178 x 220mm)

Physical size: 6.02" x 7.68" (153 x 195mm)

Mini proportional font with limited lower-case

5 lines of 12 characters, typical



**Font 11**

7 x 10 pixels

Equivalent size: 11.97" x 16.93" (178 x 220mm)

Physical size: 10.98" x 15.94" (279 x 405mm)

Large fixed-width font, capitals only (no lower-case letters)

2 lines of 6 characters, maximum



**Font 12**

9 x 14 pixels

Equivalent size: 15.28" x 23.55" (388 x 598mm)

Physical size: 14.29" x 22.56" (363 x 573mm)

Large bold fixed-width font, capitals only (no lower-case letters)

2 lines of 4 characters, maximum

## EXHIBIT B: ARROW BOARD FUNCTIONS

### Flashing patterns



Flashing left or right arrow



Flashing double arrow



Flashing four-corner warning



Flashing caution-bar warning

### Sequential patterns



Sequencing left or right stem arrow



Sequencing left or right walking arrow



Sequencing left or right chevron arrows



Alternating diamonds