


METRO™ MESSAGE SIGNS

MODEL WVTMM
PRODUCT SPECIFICATIONS | AUGUST 2022

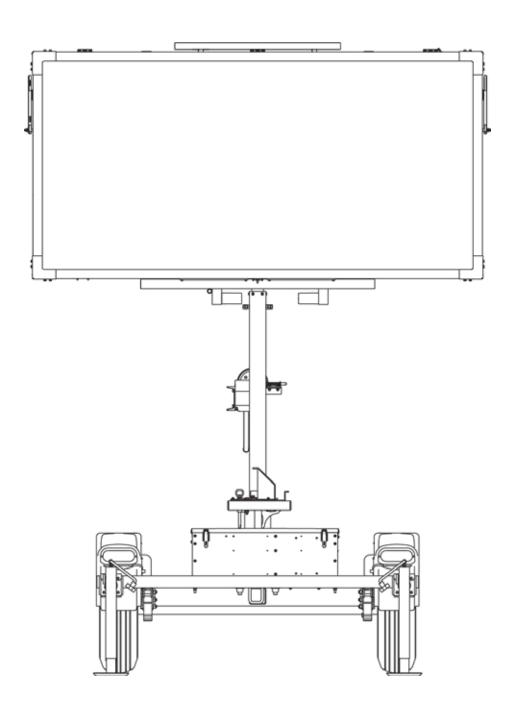

SYSTEM

1.1. Description

Wanco® designed the Metro™ Message Signs for use in metropolitan areas and wherever trailer size is a concern. Metro Signs provide the visibility and legibility of other Wanco message signs, but with a smaller footprint. Metro Message Signs provide information to the public on a full-matrix LED display. The display can present messages as text, graphics, or a combination of both.

Messages are programmed using a self-contained onboard controller, making a laptop or external controller unnecessary. The signs come configured with preprogrammed standard messages, and users can create custom messages easily.

For optimal positioning, the message sign display panel rotates independent of the trailer and its height is fully adjustable. Jack-legs provide adjustability and stability.

These signs are portable and self-powered, requiring no permanent installation or wiring. Power is provided by batteries, which are charged by an automated solar charging system. Their compact design makes them highly maneuverable and easy to deploy. They can be towed by most vehicles.

1.2. Models

Two Metro models are available. The larger display size is wider to accommodate more characters per line of text.

1.2.1. WVTMM-L

Metro matrix message sign with large-size display

1.2.2. WVTMM-M

Metro matrix message sign with medium-size display

1.3. Temperature limits

Operating -29 to 165°F (-34 to 74°C)

Storage –40 to 185°F (–40°C to 85°C)

1.4. Standards

Compliant in accordance with:

NTCIP Version 2

NEMA TS 4-2005 Section 2 for ambient temperature, vibration, shock, electro-static discharge (ESD), and radio interference

2. FEATURES

2.1. Setup

- Heavy-duty hand-winch allows one person to easily raise and lower the sign display
- · Tower rotates 360 degrees for optimal positioning
- · Lock-pin holds tower in place during operation

2.2. Operation

- Self-contained onboard control system, no laptop required
- Full-color touchscreen controller with high-resolution display
- Multi-level password protection restricts access to control software
- Preprogrammed text messages, symbols and graphics
- · Easily center each line of text
- · Internal clock facilitates built-in schedule programming
- Multiple alphanumeric fonts

- · Control box can be locked to prevent unauthorized access
- · Optical lenses and sunshades increase visibility and performance
- NTCIP compliant
- 2.3. Power system
- Battery powered and solar charging
- Energy-efficient operation results in long run times
- Solar panels charge batteries automatically without intervention
- · Charging system shuts down when batteries are fully charged, preventing damage
- Power system allows battery charging with solar panels or commercial power
- Cooling fan protects battery charger from overheating
- Battery box can be locked to prevent unauthorized access
- 2.4. Maintenance
- · Individual display modules can be replaced easily
- Standard trailer tires
- Bolt-on fenders can be replaced if damaged
- · Durable powder-coat finish resists the elements
- 2.5. Application

Common uses for Metro signs include urban areas where a sidewalk is the only place to put a message sign, congested streets where a full-size sign might impede traffic, and anywhere a full-size sign is not practical. Common applications include:

- Roadwork zones
- Traffic calming
- Road closures
- Emergency response
- Public events

DISPLAY

3.1. Cabinet

3.1.1. Description

Weather-resistant cabinet contains display modules and related electronics. Hinged door with full-size display window protects electronics and provides access for maintenance. Clasps hold door closed during operation and the door can be locked with user-supplied padlock.

3.1.2. Size

Large display

96" x 48" x 6" (244 x 122 x 15cm) W x H x D

Medium display

71" x 48" x 6" (180 x 122 x 15cm) W x H x D

3.1.3. Material

Aluminum sheet, 5052-H32, 0.062" (1.575mm) thick

3.1.4. Construction

Panels are riveted together, with internal ribs to add lateral strength

3.1.5.	Door		um extruded frame with sheet metal corner brackets. Stainless olted to top of cabinet and door.
		Window is anti-glare L	exan® solar-grade polycarbonate, 0.150" (3.81mm) thick.
		· ·	position, door fully opens to service the sign cabinet interior. s, one on each side of the cabinet, hold door open.
3.1.6.	Finish	durability and corrosio	coated with oven-baked, flat-black, powder-coat finish to ensure on protection. Assemblies are run through a five-stage, ate-wash prior to application of the finish coat.
3.1.7.	Wiring	Wiring service loop from computer box to display cabinet is routed inside liquid-tight loom and P-clamped to trailer frame. Service loop length is designed to allow sign rotation. All wiring connectors and procedures are per CSA standards.	
3.1.8.	Storage	When lowered for storage and transport, the display cabinet rests in two support cradles, parallel to the trailer length, no locking pins required	
3.2.	Display matrix		
3.2.1.	Description	inside of the display ca light up to show a port	comprised of a series of display modules laid out in a grid across the abinet. Each module has a matrix of LEDs installed on its face, which tion of the configured message. Each module features the necessary gs to ensure outstanding performance and durability.
3.2.2.	Display modules	Modular design	Allows any display module to be installed in any position in the matrix without repositioning DIP switches
		Wiring	Modules have quick-connect electrical connectors for easy servicing. All wiring terminates at a single terminal strip inside the display cabinet.
		Replacement	Each module can be exchanged in less than two minutes. The only tool needed is a 5/16-inch nut driver socket or slotted screwdriver
			After a new module is installed, a one-step initialization process causes each module to sense its position in the full-matrix display. Initialization is accomplished using the sign's controller.
		Size	16.0" (40.6cm) wide by 13.13" (33.3cm) high, nominal
		Material	FR4 glass-reinforced epoxy laminate, double-sided, black solder mask with white silkscreen
			Board thickness, 0.094" (2.388mm)
			Copper size, 1 oz (28.4g)

Product Specifications | August 2022

Coating 5-mil, military-spec, low-VOC, silicone conformal coating (Dow

Corning 1-2577) provides long-term protection against moisture and other atmospheric contaminants, resists corrosion and shorts

due to high humidity

mounts, decreasing risk of physical shock during transport and

isolating characters from chassis ground

Humidity limits Conformal coating rated to 95% relative humidity

3.2.3. Pixels Two LEDs form a "pixel"

Pixel size 0.75" x 0.75" (19 x 19mm)

Full matrix Large sign: 60 pixels wide by 30 pixels high, 1800 pixels total

Medium sign: 48 pixels wide by 30 pixels high, 1440 pixels total

Display module 12 pixels wide by 10 high, 120 pixels total

Pixel pitch 34mm, horizontal and vertical

3.2.4. LEDs Technology AllnGaP II (aluminum indium gallium phosphide) technology, T-1%

size, through-hole auto-insertion

Color range Amber, 589.5 to 592.0 nm

3.2.5. Lenses and visors Each pixel has a snap-in optical lens over the LEDs, enhancing the brightness and

angularity of each pixel while reducing power consumption. A polycarbonate visor shades each row of pixels to eliminate glare caused by direct sun exposure. The sunshades snap

onto the display module without tools. The lenses snap into the sunshades.

These enhancements enable the message sign to operate with approximately half the power consumption of other message signs. As a result, the system is fully functional using fewer solar panels and batteries, while providing outstanding brightness and readability in all lighting conditions, and 30-day battery autonomy without sun. Reducing the number of solar panels and batteries also lowers the trailer weight and reduces

maintenance costs.

3.2.6. Viewing angle Total viewing area with optical lenses, 50 degrees

3.2.7. Brightness Factory preset for optimal viewing and power consumption

3.2.8. Auto dimming Two photocells detect ambient light on the message sign; the message sign computer

adjusts the brightness of the LEDs accordingly, dimming display brightness in darkness,

increasing to full brightness in daylight

Photocells are mounted inside the sign cabinet, one facing rear and one facing front

Product Specifications | August 2022

3.2.9.	Software design	Driver	LEDs controlled through 30mA pulse-width modulation design

Addressing Each display module address is selected through a software

command; no DIP switches are used. The address does not change until reprogrammed, preventing the message from

shifting due to an individual module failure.

Pixel test Each module is equipped with individual pixel failure notification

3.2.10. Fonts 12 fonts

See Exhibit A for font samples and additional font information

Default size 5 x 9 pixels (W x H), 6.80" x 12.15" (173 x 309mm)

Large display: 3 lines of 10 characters per line, maximum Medium display: 3 lines of 8 characters per line, maximum

Smallest size 4 x 5 pixels (W x H)

Largest size 11 x 23 pixels (W x H)

Other sizes See Exhibit A

4. CONTROL SYSTEM

4.1.	Description	Self-contained onboard computer, comprised of a power control unit (PCU), located	
		behind display modules inside the message sign display cabinet; and a display control unit	
		(DCU), located inside control box on the back of the message sign display cabinet.	

4.2. Control box

4.2.1. Size 12.3" x 11.7" x 5.3" (31.2 x 29.7 x 14.4 cm) W x H x D

4.2.2. Material 0.08" aluminum

4.2.3. Mounting Securely fastened to the sign cabinet with six mounting screws

4.2.4. Door Front-panel is a door, hinged on the left, which opens fully.

4.2.5. Latch Two quarter-turn latches on front of control box door keep hinged door closed. Both

latches are keyed and can be locked.

4.2.6. Finish Cabinet and door are coated with oven-baked, equipment-white powder-coat finish to

ensure durability and corrosion protection. Assemblies are run through a five-stage,

high-pressure phosphate-wash prior to application of the finish coat.

4.3.	Control	panel
------	---------	-------

	4.3.1.	Touchscreen	Display	Full color, backlit, 7-inch display
				Capacitive touch panel
				800 x 480 pixels, W x H
				Display automatically shuts off after 10 minutes of inactivity
			Interface	Menu-based structure, accessed with virtual buttons on the touchscreen display, provides access to all sign functions including programming messages
				Virtual keyboard appears when required for text entry
				Multi-level password protection restricts access
	4.3.2.	LED indicators	Indicates the following	status conditions:
			Solar charging system is	s charging batteries
			System power shutdow	n occurred
			Programmed schedule	is active
			Power to optional rada	r device is on
	4.3.3.	Data port		ding custom messages, updating message sign software, and the optional traffic data collector (if installed; see "Options and
	4.4.	PC boards		
	4.4.1.	Coating		ary-spec, low-VOC, silicone conformal coating to provide long-term sture and other atmospheric contaminants. Resists corrosion and idity.
	4.4.2.	Humidity limits	Conformal coating rated to 95% relative humidity	
	4.5.	Serviceability		hes allow the control panel to be removed, providing access to side control box; PCU is accessible by removing display modules play cabinet
			All wiring connections h	nave quick-connect plugs
	4.6.	Controller software		
	4.6.1.	Standards	Fully NTCIP-compliant	
	4.6.2.	Security	Three levels of passwor	rd protection
	4.6.3.	Message	Instant access to progra	am new messages
programming	programming	Extremely easy to program		
		WYSIWYG (What You S	ee Is What You Get) while programming	

4.6.4.	Message types	Quick-message	Easy quick-message activation	
		Permanent	Over 90 preprogrammed permanent messages, including arrows and FHWA standards	
		Changeable	250 changeable messages stored in NV flash	
		Blank	Easy sign blanking/power off	
4.6.5.	Text alignment	Selectable: left, cente	er, or right; and top, middle, or bottom	
4.6.6.	Fonts	Selectable: see Exhibi	t A	
4.6.7.	Blinking	Each character can in	dividually blink	
		Individual lines of a m	nulti-line message can blink	
		The entire message ca	an blink	
		Adjustable timing and	d duty cycle	
4.6.8.	Message pages	Maximum 12 sequent	tial "pages" per message, sequencing speed from 0.1 to 25.5 sec.	
4.6.9.	Scheduling	Real-time clock and ca	alendar with DST control	
4.6.10.	Arrow board	Sign can display any of the following 12 full-size arrow functions		
	functions	Modes	Flashing left or right arrow	
			Flashing double arrow	
			Flashing four-corner warning	
			Flashing caution-bar warning	
			Sequencing left or right stem arrow	
			Sequencing left or right walking arrow	
			Sequencing left or right chevron arrows	
			Alternating diamonds	
			(for samples, see Exhibit B)	
		Bold graphics	Each arrow and bar is 7 pixels wide	
4.6.11.	Configuration	Menus provide access	s to all message sign configuration settings	
4.6.12.	Troubleshooting	Status and diagnostic menus provide message sign information to assist in troubleshooting		

5. TRAILER

J.	INAILLN		
5.1.	Frame		
5.1.1.	Construction	All welded structural steel	
5.1.2.	Tie-downs	Three tie-downs: one on each front corner of frame, one centered on rear of frame	
5.1.3.	Finish	Oven-baked, safety-orange powder-coat finish to ensure durability and corrosion protection. Assemblies are bead-blasted and then run through a five-stage, high-pressure phosphate-wash prior to application of the finish coat.	
		See "Options and Optional Equipment" for color options.	
5.2.	Fenders	Round, full wheel coverage, bolted to trailer frame, removable and replaceable	
5.3.	Axle assembly	2000 lb (907kg) capacity, 5 on 4.5" B.C. idler hub	
5.4.	Springs	Double-eye leaf springs	
5.5.	Tires	ST205/75D15 steel-belted trailer tires, load rating B	
5.6.	Drawbar		
5.6.1.	Construction	Telescopes inside receiver sleeve welded under trailer frame. Removable for shipping and for added theft protection if needed. Secures with two 1/2-inch (12mm) diameter bolts.	
5.6.2.	Material	Square tubing, 3" x 3/16" wall (7.62cm x 0.476cm wall)	
5.6.3.	Jack	Top-wind swivel, 2000-lb. (907kg) capacity, steel footpad, 10" (25cm) total travel	
5.6.4.	Tow hitch	Standard 2-inch ball coupler tow-hitch, SAE Class 2, 3500 lb (1588kg) capacity. Bolts to drawbar, removable and replaceable.	
		See "Options and Optional Equipment" for tow-hitch options.	
5.6.5.	Tow chains	Two high-test proof coil chain assemblies with clevis slip hooks for towing. Chains attached to drawbar with quick connectors.	
		Material diameter 0.406" (10.3mm)	
		Working load limit 5400 lb (2450kg)	
		Breaking force 16,200 lb (72kN)	
5.7.	Stabilizer jacks	Four swivel jacks, each with 2000 lb (907kg) capacity, mounted on corners of trailer frame	
5.8.	Wind resistance	In the deployed position, the maximum sustainable wind speed before overturning, when supported by the standard jack stands with tires off the ground, is 50 mph (80km/h)	

5.9.	Wiring	
5.9.1.	Description	Wiring to connect tow vehicle and trailer for trailer taillights is installed inside drawbar, with pigtails and connectors at both ends; no crimping required
5.9.2.	Trailer plug	A sealed, molded, 4-square connector plugs into harness under trailer
5.9.3.	Tow-vehicle plug	Two-piece assembly with 4-flat molded connector on harness plugs into tow vehicle
		Meets SAE J1239
		See "Options and Optional Equipment" for tow-vehicle plug options
5.9.4.	Protection	All trailer wiring encased in UV protective loom, and attached with P-clamp riveted to trailer frame; no exposed wires
5.10.	Taillights	Two oval-shaped, sealed, LED, combination stop, turn and taillights integrated with fenders
5.11.	License plate	Lighted license plate light holder
5.12.	Reflectors	Sides of trailer have amber reflectors near front and red reflectors near rear
		See "Options and Optional Equipment" for reflective tape
5.13.	Tower assembly	
5.13.1.	Function	Sign cabinet is raised and lowered on a telescoping tower
5.13.2.	Tower construction	Two sections of square steel tubing with the inner section telescoping inside the outer section.
		Nylon guide blocks keep the sections tight, eliminating the need for greasing the tower and preventing dirt from building up on the inner tower section. Dirt would cause performance problems and maintenance issues.
5.13.3.	Swivel base	A steel tubular weldment is bolted to the trailer frame. The outer tower section rotates on a thrust bearing and washers inside the swivel base, reducing rotating friction.
5.13.4.	Finish	Lower tower section and swivel base are coated with oven-baked, safety-orange powder-coat finish to ensure durability and corrosion protection. Assemblies are run through a five-stage, high-pressure phosphate-wash prior to application of the finish coat.
		Upper tower section is treated for corrosion resistance.
		See "Options and Optional Equipment" for color options.
5.13.5.	Height	At fully deployed height, 84" (213cm) from ground to bottom of display cabinet
5.13.6.	Height lock	Spring-loaded locking pin prevents tower from falling if the winch or cable were to fail

5.13.7.	Winch assembly	Function	Hand-operated winch raises and lowers sign cabinet
		Capacity	1500 lb (680kg)
		Brake	Safety friction-brake prevents display cabinet from falling if operator loses grip on winch handle
		Cable	1/4" (6.35mm) diameter galvanized aircraft cable
5.13.8.	Rotation	Sign rotates by hand,	pivoting 360 degrees on tower
5.13.9.	Rotation lock	Sign rotation is locked tower	d with a locking pin inserted through a horizontal plate mounted to
		See "Options & Optio	nal Equipment" for rotation brake option
5.13.10). Sight tube	A sight tube for aimin	g the message sign is mounted under display cabinet
6.	POWER SYSTEM		
6.1.	Description	Electronics powered I charging system	by batteries, which are charged automatically with integrated solar
6.2.	Battery box		
6.2.1.	Function	Holds batteries and re	emote charger
		See "Options and Opt	cional Equipment" for heavy-duty secure battery box
6.2.2.	Construction	Riveted all-steel cons	
		All parts powder-coat	-
		·	ox separates batteries from electronics
		Louvers provide venti	osed and can accept user-supplied padlocks
6.2.3.	Location		etween fenders, bolted to trailer frame
6.3.	Batteries		
6.3.1.	Description	Four deep-cycle golf-	cart-type batteries, wired in parallel and series for a 12-volt system
			cional Equipment" for battery options
6.3.2.	Voltage	6Vdc each	
6.3.3.	Weight	Approx. 60 lb (26kg) 6	each
6.3.4.	Capacity	430 Ah total capacity	@ 12Vdc
6.3.5.	Low-voltage	•	rom full discharge, the LVD system automatically shuts down power

when battery voltage drops to preset level, and re-engages power when battery charge

returns to optimum

disconnect (LVD)

6.4.	Remote charger	
6.5.	Function	Plugs into a standard commercial power source to recharge batteries if battery voltage drops due to lack of sun for automated solar charging system
6.5.1.	Туре	12-volt battery charger
6.5.2.	Location	Inside battery box, mounted to divider panel on opposite side from batteries
6.5.3.	Output capacity	15A
6.5.4.	Output voltage	13.2Vdc range "float" mode 13.6Vdc range "absorption" mode 14.2Vdc range "bulk" mode
6.5.5.	Input voltage	105 to 135Vac, standard three-prong plug
6.5.6.	Input frequency	50 to 60 Hz
6.5.7.	Cooling	Automatic fan cooling
6.6.	Solar	
6.6.1.	Panels	One high-efficiency multi-crystal photovoltaic solar module
6.6.2.	Location	Behind message sign, over tower. Solar panel array lies flat; rises and rotates with message sign. No shadowing effect on any trailer component.
6.6.3.	Power output	Large sign 130W
		Medium sign 85W
		See "Options and Optional Equipment" for solar power options
6.6.4.	Current	9.5A max. system current 10.3A open short-circuit current
6.6.5.	Voltage regulation	17.9Vdc max.
		21.8Vdc open short-circuit voltage
6.6.6.	Regulation	Solar panels regulated by message sign control system
6.6.7.	Security	Solar panel array bolted to message sign frame with security screws and special security nut. Tool for security screws mounted inside battery box.


7. DIMENSIONS & WEIGHT

7.1. Dimensions


7.1.1. Large sign

inches (cm)

Travel position

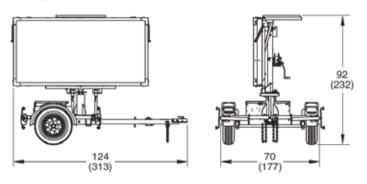


Deployed

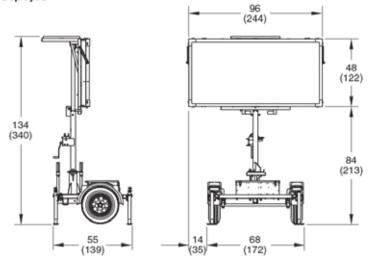


7.1.2. Medium sign


inches (cm)


Travel position





Deployed





- 7.2. Weight
- 7.2.1. Large sign

Approx. 1500 lb (680 kg)

7.2.2. Medium sign

Approx. 1400 lb (635 kg)

8. OPTIONS AND OPTIONAL EQUIPMENT

8.1. Tow hitch Combo-hitch for pintle hook and 2-inch ball hitch

Heavy-duty lunette ring, 2½" ID x 1%" cross-section

8.2. Tow-vehicle plug Many types of plugs available, prewired at the factory; contact factory for details

8.3. **Rotation brake** For sign rotation lock, a mechanical friction caliper and disk brake replaces standard

rotation lock mechanism. The ½-inch thick, round, zinc-plated brake disk is bolted to the

outer tower section. An adjustable lever operates brake.

8.4. Power

8.4.1. Additional batteries For geographic locations with less solar charging potential or colder weather, and for

applications that require year-round charging, add batteries for greater capacity

Option Two additional 6Vdc deep-cycle batteries, 215Ah additional capacity

8.4.2. AGM batteries Replace deep-cycle batteries with top-of-the-line absorbed glass mat (AGM) batteries

Features 100% maintenance-free

Sealed and spill-proof

Faster recharge and greater freeze resistance than conventional batteries

Contains less lead than conventional batteries

Options Two 4D AGM 12Vdc batteries, 400Ah total capacity

Three 4D AGM 12Vdc batteries, 600Ah total capacity

Weight Approx. 160 lb (72kg) each

8.4.3. Remote charger When required for added battery charging capacity, replace standard remote charger with

higher amperage charger

Options 12-volt, 45-amp charger

12-volt, 75-amp charger

Details Output voltage 13.4Vdc @ full load

13.6Vdc standard float voltage

14.2Vdc with dual-voltage jack installed

Input voltage 108 to 132Vac, standard three-prong plug

Input frequency 50 to 60 Hz

8.4.4. Solar For geographic locations with less solar charging potential or colder weather, and for

applications that require year-round charging, additional solar power is available

Options include 170W and 255W solar arrays; contact factory for details

8.5.	Secure battery box	High-security battery box features heavy-gauge steel lid, hidden hinges, and heavy-duty hidden-shackle padlocks. Replaces standard battery box.		
8.6.	Reflective tape	Reflective red-and	d-white conspicuity tape across rear trailer frame for increased visibility	
8.7.	Finish color	Specify power-coa	at color and, if applicable, color scheme	
8.8.	Radar-based speed m	onitoring system		
8.8.1.	Description		largest, nearest mass moving toward it. The message sign conveys a ssage to the motorist.	
8.8.2.	Sensor	Microwave K-ban	d, approach-only	
8.8.3.	Location		ed on the bottom of the message sign display cabinet, just off-center, for veness regardless of which side of the road the trailer is being used	
8.8.4.	Enclosure	Radar head is sea	led to withstand the elements	
8.8.5.	Standards compliance	FCC approved CE compliant		
8.8.6.	Distance range	1000 ft (305 m)		
8.8.7.	Speed range	5 to 138 mph (8 to 222 km/h)		
8.8.8.	Accuracy	±1 mph from 5 to 100 mph (±1.6 km/h from 8 to 161 km/h)		
8.8.9.	Electrical protection	Fused and reverse-polarity protected		
8.8.10.	Calibration	Calibration not required		
8.9.	Cellular modem packa	age		
8.9.1.	Purpose	The remote communications package enables the message sign to be controlled from remote locations away from the message sign, using an Internet-connected computer, tablet, or smartphone. Includes all of the items described below.		
8.9.2.	Remote NTCIP central control software	Description	Easy-to-use program connects a computer to an individual message sign via an Internet connection. Used for changing messages, checking on trailer health status (such as battery voltages), viewing GPS locations, and setting message schedules.	
		System requirements	Microsoft® Windows® (most versions) .NET framework Internet connection	

8.9.3.	Web-based remote control	Description	Using a standard Web browser, allows connection to an individual message sign without software. Ideal for smartphone users.		
		System	Modern standards-compliant Web browser with JavaScript enabled		
		requirements	A platform that supports one of these browsers (smartphone, tablet, or computer)		
			Internet connection		
8.9.4.	Wanco Fleet Manager	Description	Web-based application for managing even the most diverse message sign fleets		
		Features	Add or remove equipment to/from groups for quick access, ideal for managing contractor rentals or entire projects		
			Map GPS locations of entire message sign fleet simultaneously		
			Record vital information from signs, such as message changed by user and date, battery and solar voltages, and equipment alarms		
			Mass broadcast capability, perfect for Amber Alerts and emergencies		
		System	Modern standards-compliant Web browser with JavaScript enabled		
		requirements	A platform (computer of mobile device) that supports such a browser		
			Internet connection		
8.9.5.	Cellular plans	Wanco cellular service	Wanco provides Verizon® cellular service without activation charges, monthly payments, or overage charges. User makes a single payment annually to Wanco. For increased security, Wanco hosts the service on a virtual private network (VPN).		
		User provided	User obtains data plan from service provider and makes monthly payments to provider. Wanco programs modem according to user-provided specifications at time of modem purchase. Wanco tests modem setup.		
8.9.6.	Modem	Compact industri	al 4G LTE modem with GPS		
		See "Options and	Optional Equipment" for modem options		
8.10.	Traffic Data Classifier	System			
8.10.1.	Design	Radar-based data collector, nonintrusive, does not require loops or hoses, no disturbance of traffic flow during installation or use			
8.10.2.	Direction	Registers both ap	pproaching and departing vehicles		
8.10.3.	Traffic lanes	Most effective fo	Most effective for 2-lane roads		
8.10.4.	Traffic count	Can record data for up to 5 million vehicles in internal memory			
8.10.5.	Data format	Speed, date, time	Speed, date, time, direction, length for each vehicle		

Product Specifications | August 2022

8.10.6.	Units	English or metric

8.10.7. Time stamp Yr,Mo,Dy,Hr,Min,Sec.

8.10.8. Speed range 5 to 138 mph (8 to 222 km/h)

8.10.9. Sensor Microwave K-band 24.125 GHz

8.10.10. Power supply Message sign batteries

8.10.11. Power output 20 dbm (EIRP)

8.10.12. Current 110 mA

8.10.13. Internal memory 16GB

8.10.14. Baud rate 9600, 8 bit, no parity

8.10.15. Calibration Calibration not required

8.10.16. Regulatory rating FCC part 15 class A, Canadian RSS-210

8.10.17. Installation Automatically positioned horizontally when trailer is level; adjustable bracket allows user

to point toward traffic at a 45-degree angle

8.10.18. Analytic software Wanco Traffic Analyzer

EXHIBIT A: MESSAGE FONTS

Large sign



Font 1

5 x 9 pixels

Equivalent size: 6.80" x 12.15" (173 x 309mm)

Physical size: 6.10" x 11.46" (155 x 291mm)

Standard fixed-width font with lower-case letters

3 lines of 10 characters, maximum



Font 2

5 x 9 pixels

Equivalent size: 6.80" x 12.15" (173 x 309mm) Physical size: 6.10" x 11.46" (155 x 291mm)

Standard fixed-width font with lower-case letters and increased horizontal spacing 3 lines of 7 characters, maximum



Font 3

6 x 9 pixels

Equivalent size: 8.14" x 12.15" (207 x 309mm) Physical size: 7.44" x 11.46" (189 x 291mm)

Bold proportional font with 4x9-pixel capitals for lower-case letters 3 lines of 8 characters, typical



Font 4

6 x 11 pixels

Equivalent size: 8.14" x 14.83" (207 x 377mm) Physical size: 7.44" x 14.14" (189 x 359mm)

Bold proportional font with lower-case letters and accented characters

2 lines of 8 characters, typical



Font 5

6 x 11 pixels

Equivalent size: 8.14" x 14.83" (207 x 377mm) Physical size: 7.44" x 14.14" (189 x 359mm)

Bold proportional font with lower-case letters, accented characters, and increased spacing

2 lines of 7 characters, typical



Font 6

5 x 14 pixels

Equivalent size: 6.80" x 18.85" (173 x 479mm) Physical size: 6.10" x 18.15" (155 x 461mm)

Tall fixed-width font with 5x8-pixel capitals for lower-case letters

2 lines of 10 characters, maximum

Large sign (continued)



Font 7

7 x 12 pixels

Equivalent size: 9.48" x 16.17" (241 x 411mm) Physical size: 8.78" x 15.47" (223 x 393mm)

Bold fixed-width font with 6x8-pixel capitals for lower-case letters

2 lines of 7 characters, maximum



Font 8

7 x 23 pixels

Equivalent size: 9.48" x 30.89" (241 x 785mm) Physical size: 8.78" x 30.20" (223 x 767mm)

Large fixed-width font with 6x14-pixel capitals for lower-case letters

1 line of 7 characters, maximum



Font 9

11 x 23 pixels

Equivalent size: 14.83" x 30.89" (377 x 785mm) Physical size: 14.14" x 30.20" (359 x 767mm)

Large bold fixed-width font, capitals only (no lower-case letters)

1 line of 5 characters, maximum



Font 10

4 x 5 pixels

Equivalent size: 5.46" x 6.80" (139 x 173mm)

Physical size: 4.77" x 6.10" (121 x 155mm)

Mini proportional font with limited lower-case

4 lines of 12 characters, typical 14 characters per line, maximum



Font 11

7 x 10 pixels

Equivalent size: 9.48" x 13.49" (241 x 343mm) Physical size: 8.78" x 12.80" (223 x 325mm)

Large fixed-width font, capitals only (no lower-case letters)

2 lines of 6 characters, maximum



Font 12

9 x 14 pixels

Equivalent size: 12.15" x 18.85" (309 x 479mm) Physical size: 11.46" x 18.15" (291 x 461mm)

Large bold fixed-width font, capitals only (no lower-case letters)

2 lines of 4 characters, maximum

Medium sign



Font 1

5 x 9 pixels

Equivalent size: 6.80" x 12.15" (173 x 309mm)

Physical size: 6.10" x 11.46" (155 x 291mm)

Standard fixed-width font with lower-case letters

3 lines of 8 characters, maximum



Font 2

5 x 9 pixels

Equivalent size: 6.80" x 12.15" (173 x 309mm) Physical size: 6.10" x 11.46" (155 x 291mm)

Standard fixed-width font with lower-case letters and increased horizontal spacing

3 lines of 6 characters, maximum



Font 3

6 x 9 pixels

Equivalent size: 8.14" x 12.15" (207 x 309mm)

Physical size: 7.44" x 11.46" (189 x 291mm)

Bold proportional font with 4x9-pixel capitals for lower-case letters

3 lines of 7 characters, typical



Font 4

6 x 11 pixels

Equivalent size: 8.14" x 14.83" (207 x 377mm) Physical size: 7.44" x 14.14" (189 x 359mm)

Bold proportional font with lower-case letters and accented characters

2 lines of 6 characters, typical



Font 5

6 x 11 pixels

Equivalent size: 8.14" x 14.83" (207 x 377mm) Physical size: 7.44" x 14.14" (189 x 359mm)

Bold proportional font with lower-case letters, accented characters, and increased spacing

2 lines of 6 characters, typical



Font 6

5 x 14 pixels

Equivalent size: 6.80" x 18.85" (173 x 479mm) Physical size: 6.10" x 18.15" (155 x 461mm)

Tall fixed-width font with 5x8-pixel capitals for lower-case letters

2 lines of 8 characters, maximum

Medium sign (continued)



Font 7

7 x 12 pixels

Equivalent size: 9.48" x 16.17" (241 x 411mm) Physical size: 8.78" x 15.47" (223 x 393mm)

Bold fixed-width font with 6x8-pixel capitals for lower-case letters

2 lines of 6 characters, maximum



Font 8

7 x 23 pixels

Equivalent size: 9.48" x 30.89" (241 x 785mm) Physical size: 8.78" x 30.20" (223 x 767mm)

Large fixed-width font with 6x14-pixel capitals for lower-case letters

1 line of 6 characters, maximum



Font 9

11 x 23 pixels

Equivalent size: 14.83" x 30.89" (377 x 785mm) Physical size: 14.14" x 30.20" (359 x 767mm)

Large bold fixed-width font, capitals only (no lower-case letters)

1 line of 4 characters, maximum



Font 10

4 x 5 pixels

Equivalent size: 5.46" x 6.80" (139 x 173mm)

Physical size: 4.77" x 6.10" (121 x 155mm)

Mini proportional font with limited lower-case

4 lines of 9 characters, typical 10 characters per line, maximum



Font 11

7 x 10 pixels

Equivalent size: 9.48" x 13.49" (241 x 343mm) Physical size: 8.78" x 12.80" (223 x 325mm)

Large fixed-width font, capitals only (no lower-case letters)

2 lines of 5 characters, maximum



Font 12

9 x 14 pixels


Equivalent size: 12.15" x 18.85" (309 x 479mm) Physical size: 11.46" x 18.15" (291 x 461mm)

Large bold fixed-width font, capitals only (no lower-case letters)

2 lines of 3 characters, maximum

EXHIBIT B: ARROW-BOARD FUNCTIONS

Flashing patterns

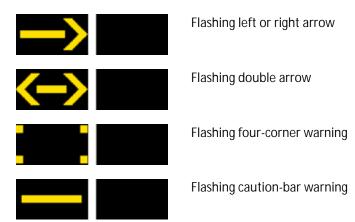

Sequential patterns

